

Link do produktu: <https://www.gotronik.pl/konektor-szybkozlaczka-4-kanalowa-zatrzaskowa-0-2-4mm0-14-4mm-32a-250v-p-11941.html>



Konektor szybkozłączka 4 kanałowa zatrzaskowa 0,2-4mm²/0,14-4mm² 32A 250V


Cena brutto	6,00 zł
Cena netto	4,88 zł
Czas wysyłki	24 godziny
Numer katalogowy	DF2604D-4C


Opis produktu



Konektor szybkozłączka 4 kanałowa zatrzaskowa 0,2-4mm²/0,14-4mm² 32A 250V


Szybkozłączka zatrzaskowa to praktyczne rozwiązanie do szybkiego i pewnego łączenia przewodów o przekroju od 0,2 do 4 mm² (dla przewodów twardych) i od 0,14 do 4 mm² (dla przewodów miękkich). Złącze obsługuje napięcie do 250V i prąd do 32A, co zapewnia jego uniwersalne zastosowanie w wielu instalacjach elektrycznych. Wysoka przewodność i odporność na utlenianie oraz korozję sprawiają, że konektor jest trwały i niezawodny, nawet w trudnych warunkach. Dzięki stabilnemu zatrzaskowi połączenie pozostaje pewne i bezpieczne, minimalizując ryzyko poluzowania.

Szybkozłączki dostępne w naszej ofercie:

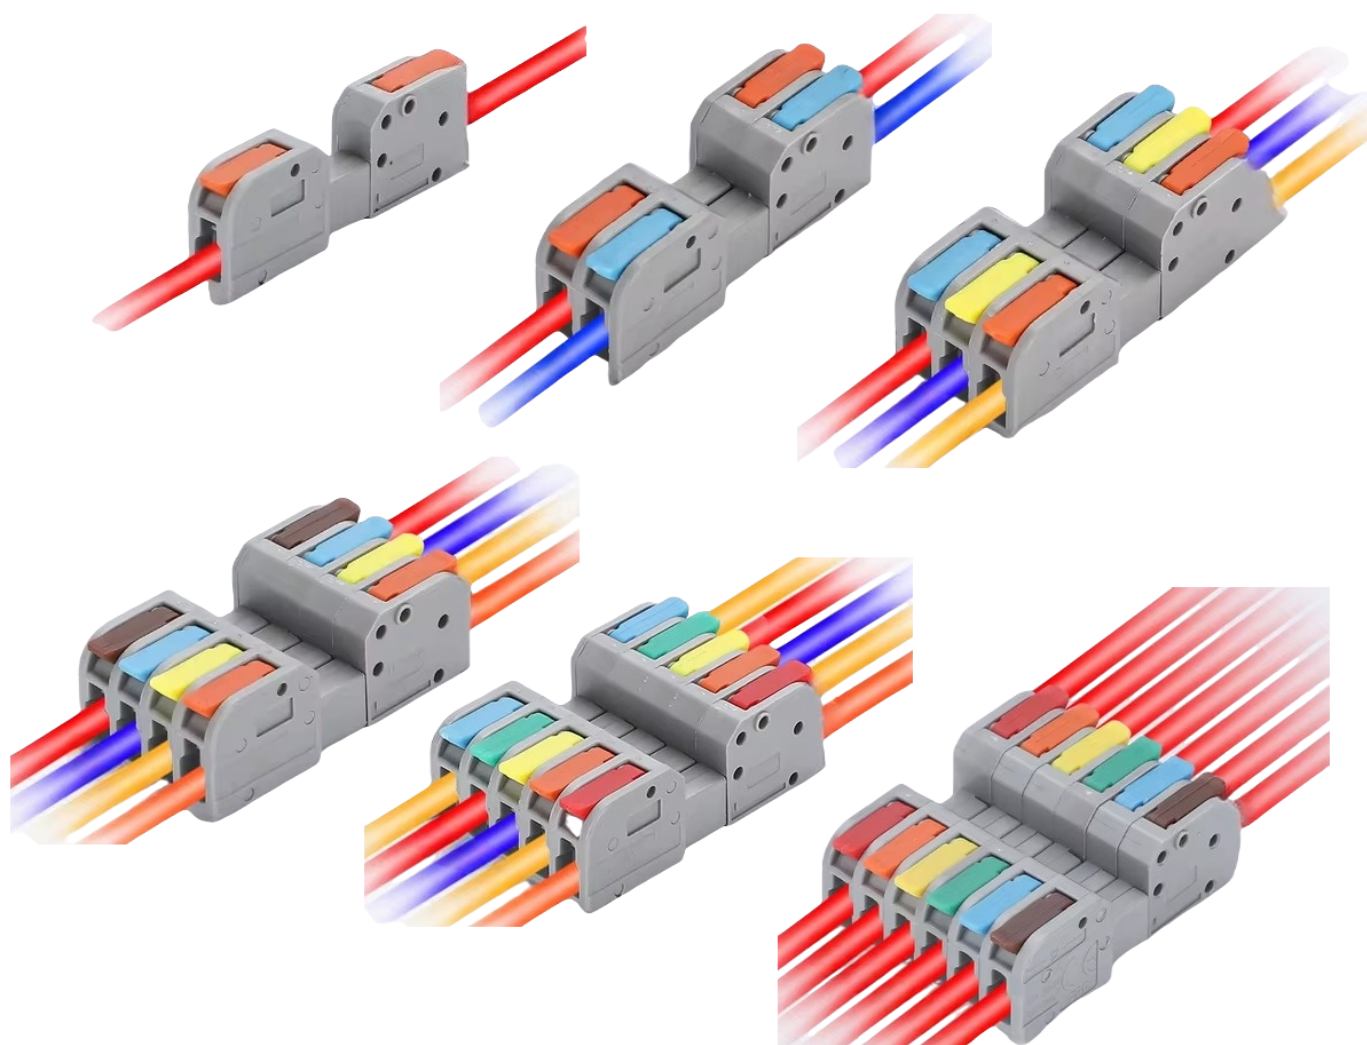

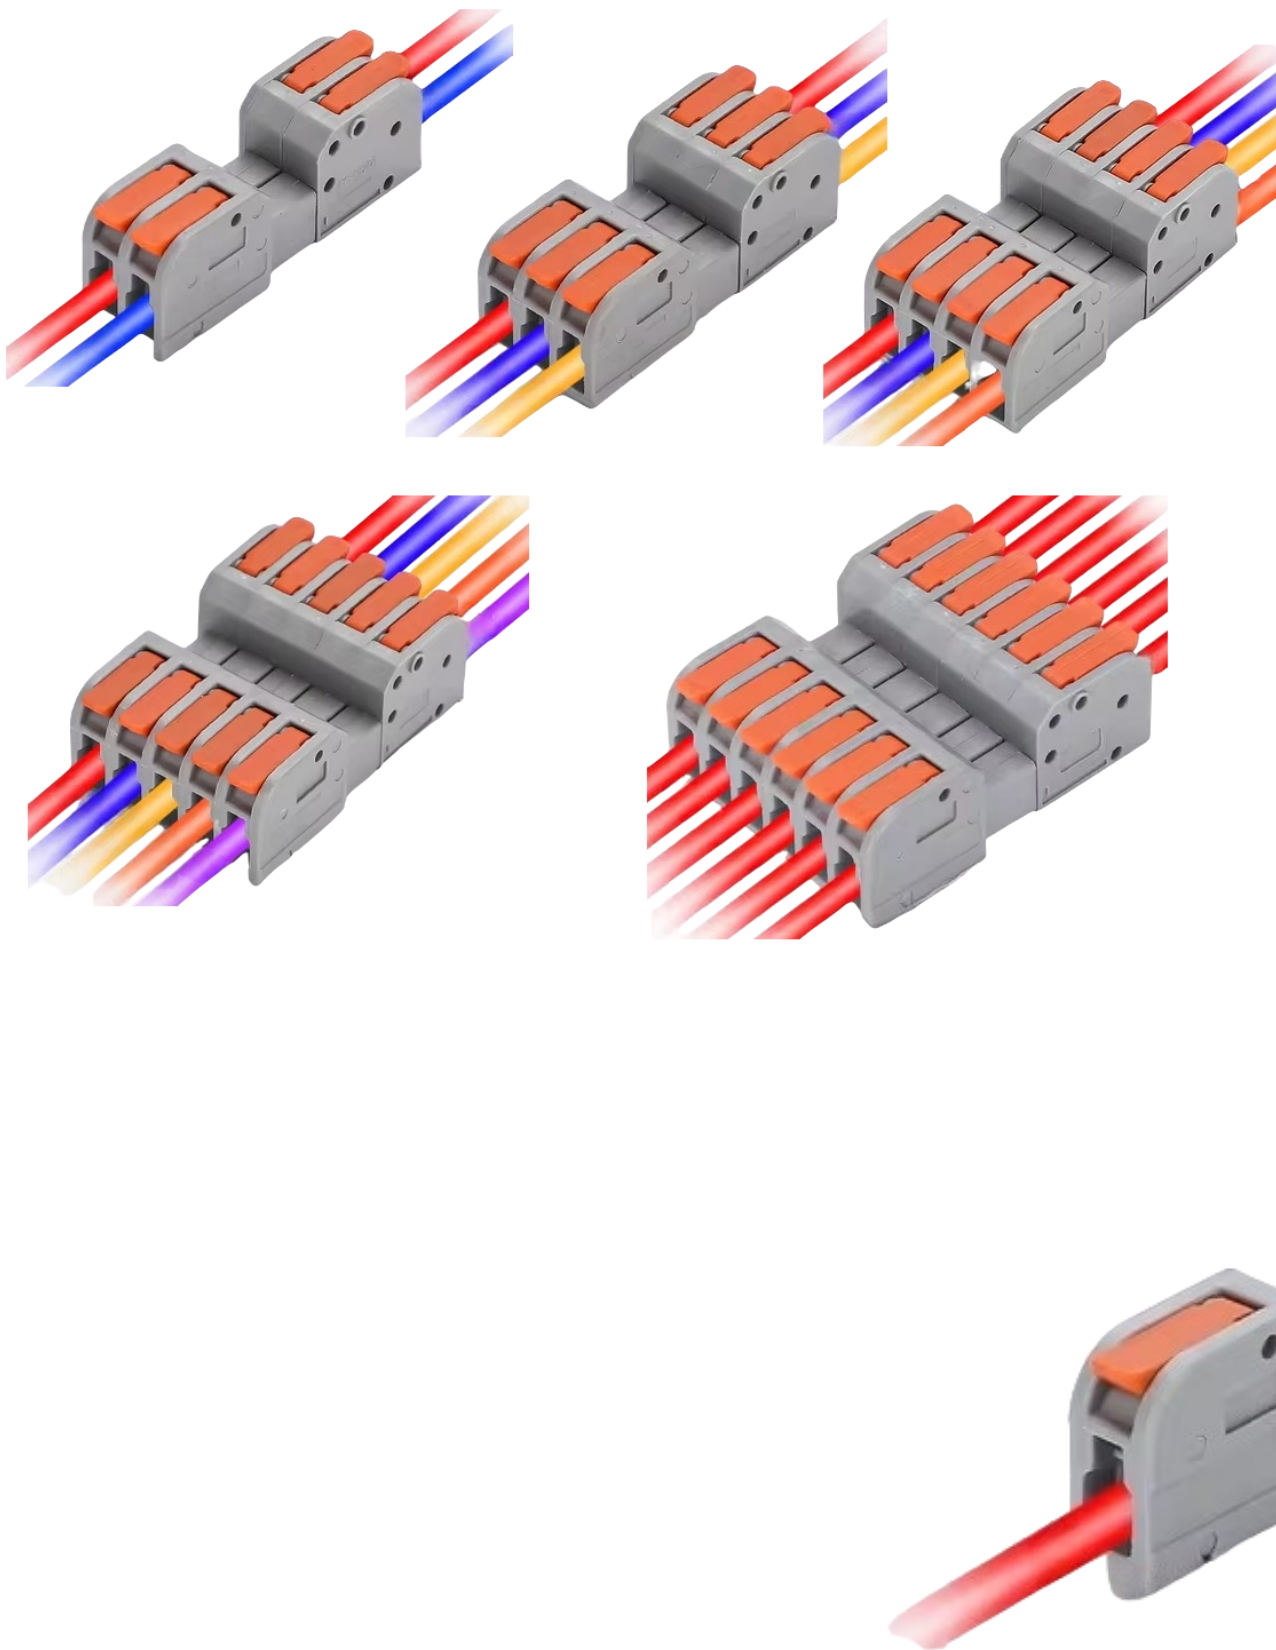

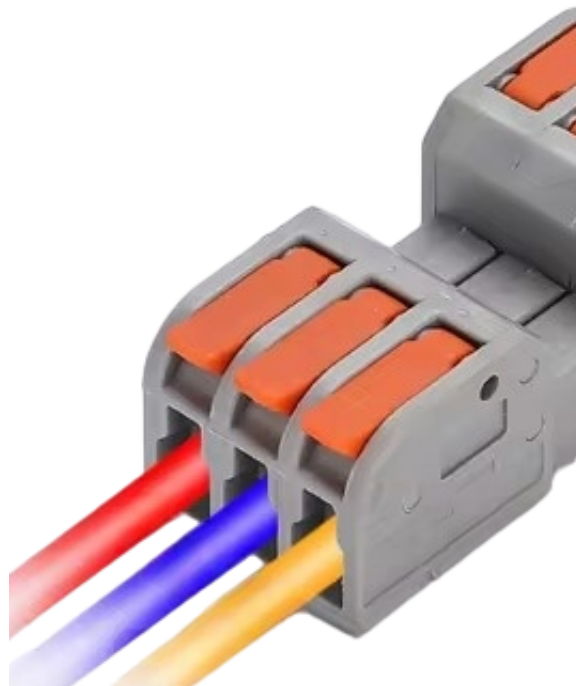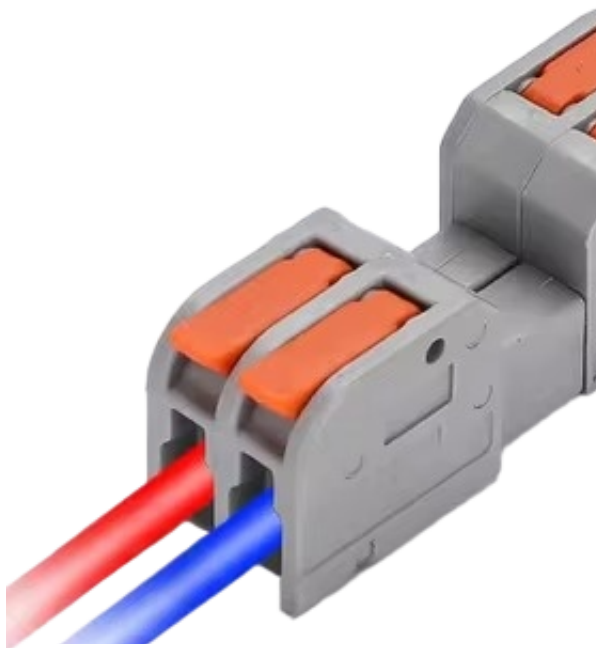

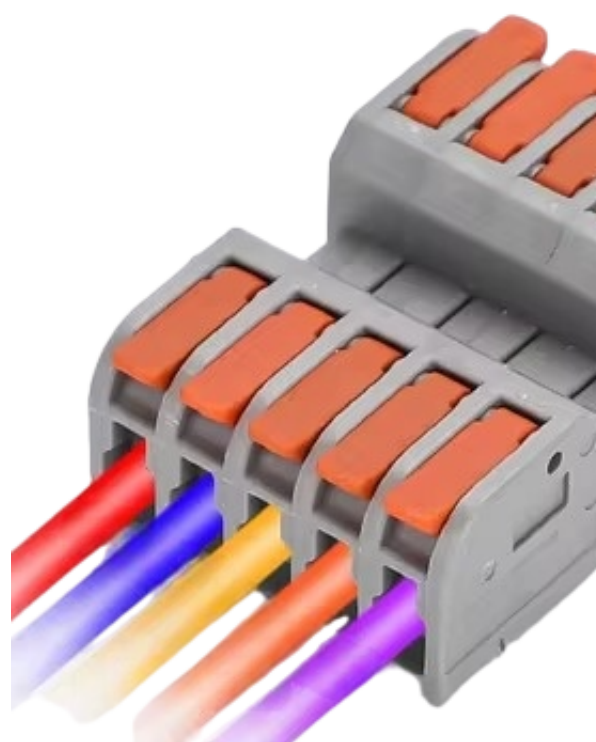



Dane techniczne:


- przekrój przewodu: 0,2-4mm² (przewód twardy), 0,14 - 4mm² (przewód miękki)
- napięcie znamionowe: **250V**
- typ: 4 kanałowa
- prąd znamionowy: **32A**
- **doskonała przewodność**
- wysoka odporność na utlenianie i korozję
- niełatwa do poluzowania

Oferta dotyczy samej szybkozłączki. Dodatkowy przewód nie jest dołączany!

DF series wiring terminal

Fine copper guide plate male/female lug wiring terminal


Supply | One-stop procurement | Save time and effort

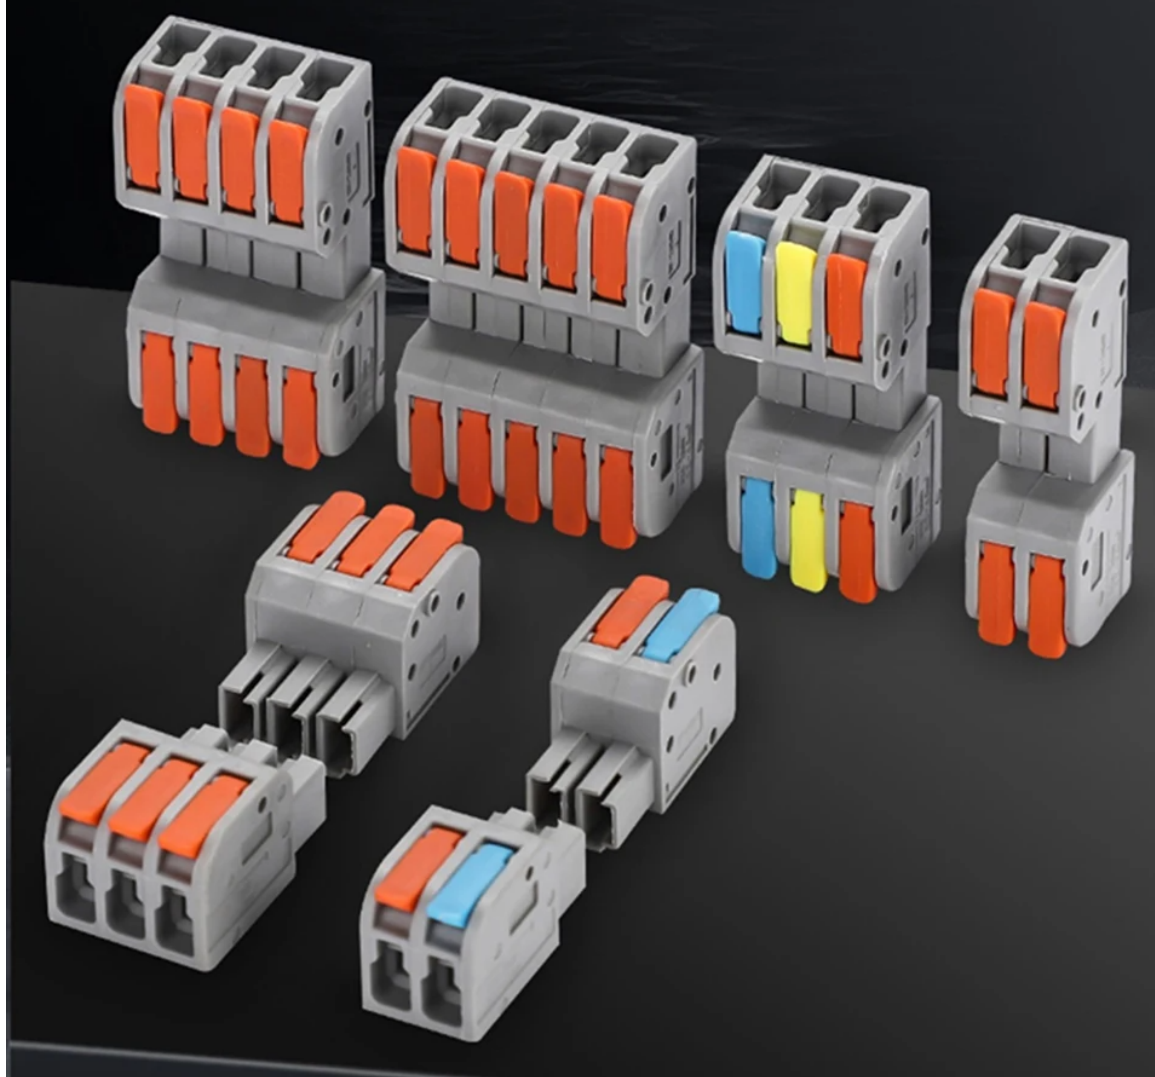

Male/female lug wiring terminal

...

For long-distance wiring, connect the wires on both sides separately and then misalign male/female lug to complete the wiring.

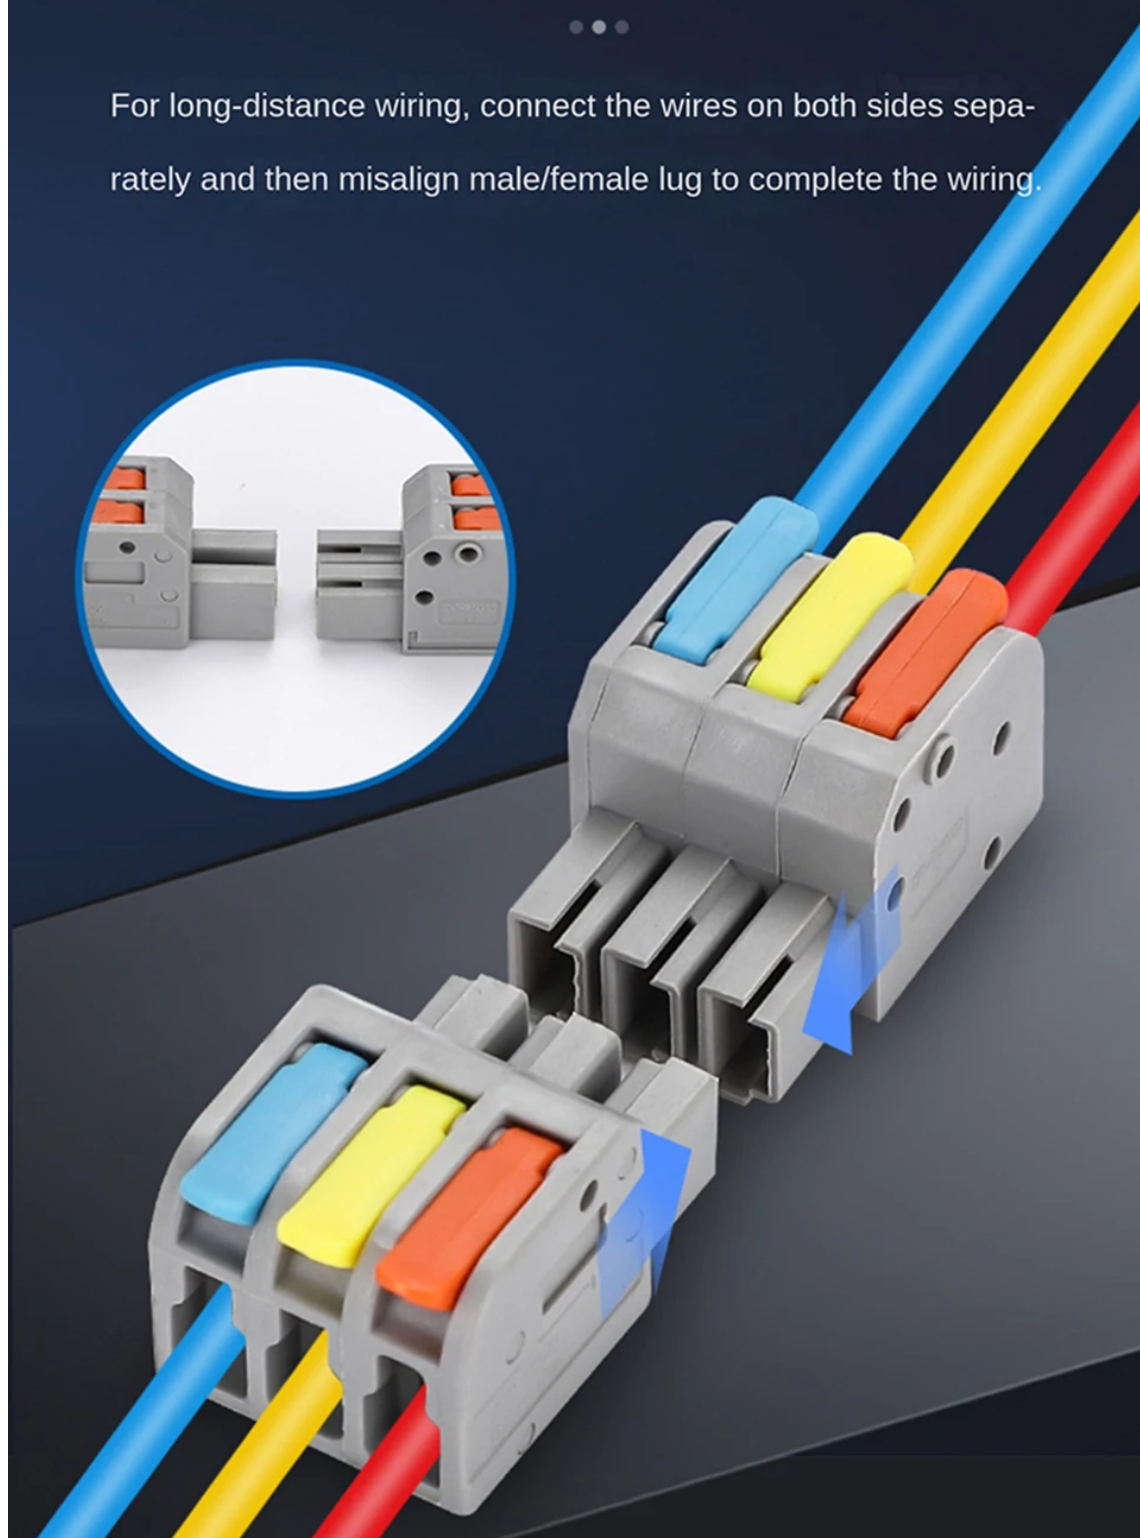

Copper guide

Strong conductivity



Red copper guide, 0.8MM thickness, excellent conductivity, strong oxidation resistance and corrosion resistance, not easy to loosen



Stainless steel jump
ring

Mouth Copper guide

Flame retardant shell

Environmentally friendly and durable

Flame retardant nylon material, not easy to deform and change color, the shell is flame retardant and high temperature resistant, and it will not support combustion even when the wire is fired



Product Parameters

Specification size


Product Name	Male/female lug wiring terminal	Product Current	32A
Product Model	DF series	Product voltage	250V
Wiring range	0.2-4.0mm ² (Hard wire) 0.14-4.0mm ² (Flexible cable)		

Let me solve
your troubles.

A complete range
of specifications

Multiple specifications

Willful selection

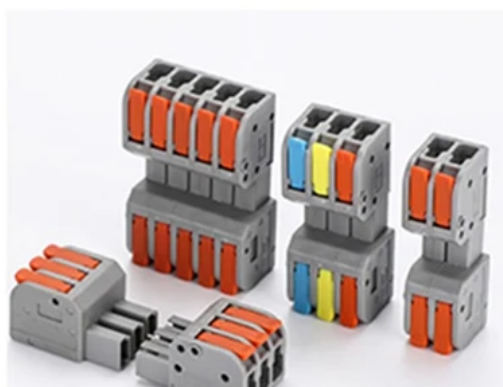

Booster design

The booster can hold the wire firmly, and this booster can be easily opened and closed.



Incoming line

Incoming line range
0.2-4.0 mm² [hard]
0.14-4.0 mm² [soft]



Procedure

Simple and convenient


— — — — —



Open booster wire
insert incoming line



Press the booster by hand

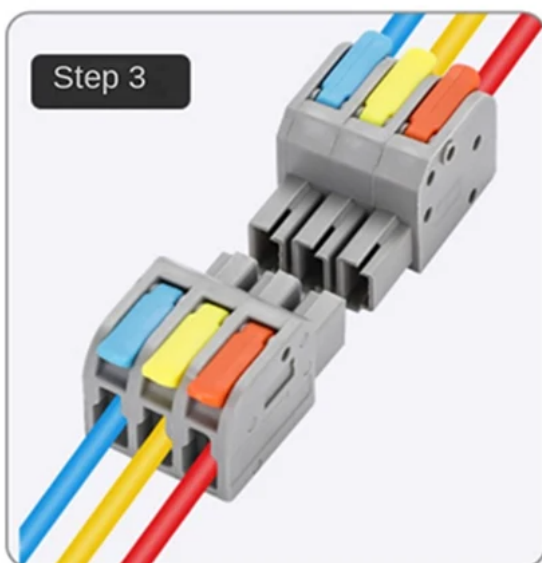

Two same hole male/female lug interfaces



Complete wiring

Product Photograph



