

Link do produktu: <https://www.gotronik.pl/konektor-szybkozlaczka-5-kanalowa-zatrzaskowa-0-2-4mm0-14-4mm-32a-250v-p-11942.html>



## Konektor szybkozłączka 5 kanałowa zatrzaskowa 0,2-4mm<sup>2</sup>/0,14-4mm<sup>2</sup> 32A 250V


Cena brutto	<b>7,50 zł</b>
Cena netto	<b>6,10 zł</b>
Czas wysyłki	<b>24 godziny</b>
Numer katalogowy	<b>DF2604D-5C</b>


### Opis produktu

#### **Konektor szybkozłączka 5 kanałowa zatrzaskowa 0,2-4mm<sup>2</sup>/0,14-4mm<sup>2</sup> 32A 250V**

Szybkozłączka zatrzaskowa to praktyczne rozwiązanie do szybkiego i pewnego łączenia przewodów o przekroju od 0,2 do 4 mm<sup>2</sup> (dla przewodów twardych) i od 0,14 do 4 mm<sup>2</sup> (dla przewodów miękkich). Złącze obsługuje napięcie do 250V i prąd do 32A, co zapewnia jego uniwersalne zastosowanie w wielu instalacjach elektrycznych. Wysoka przewodność i odporność na utlenianie oraz korozję sprawiają, że konektor jest trwały i niezawodny, nawet w trudnych warunkach. Dzięki stabilnemu zatrzaskowi połączenie pozostaje pewne i bezpieczne, minimalizując ryzyko poluzowania.

**Szybkozłączki dostępne w naszej ofercie:**

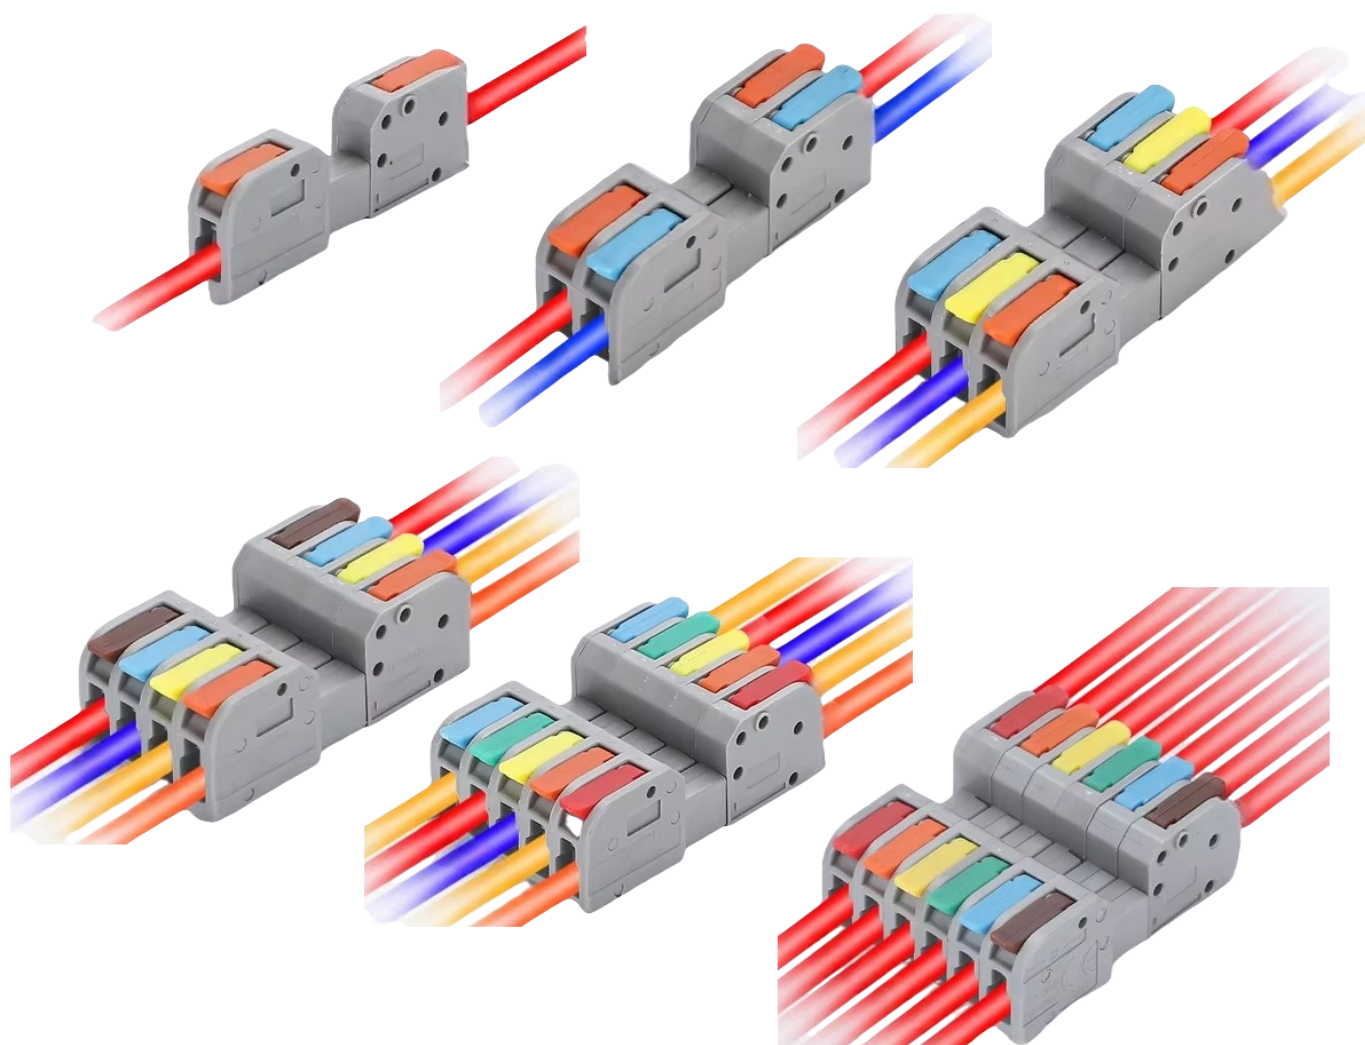

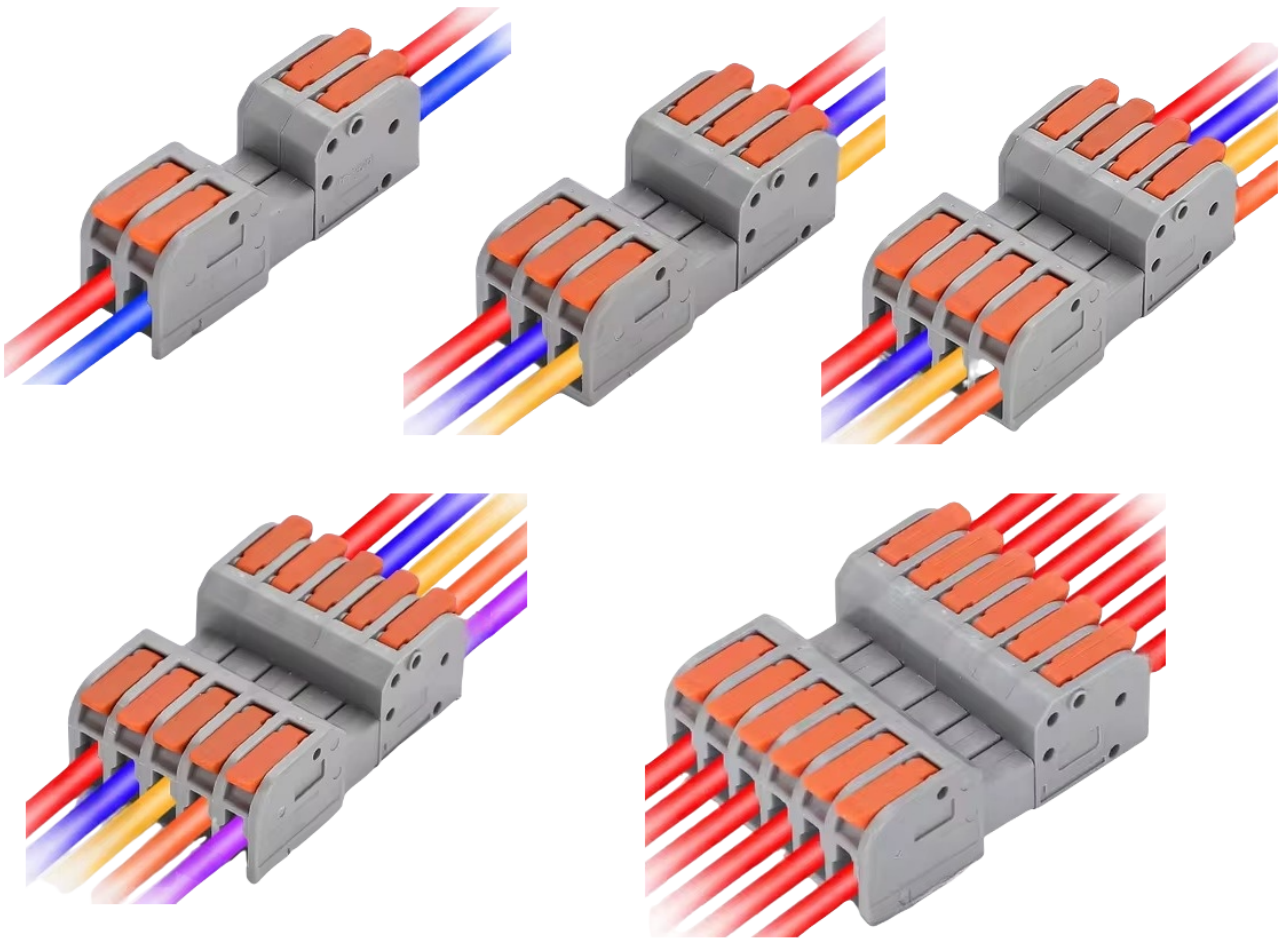














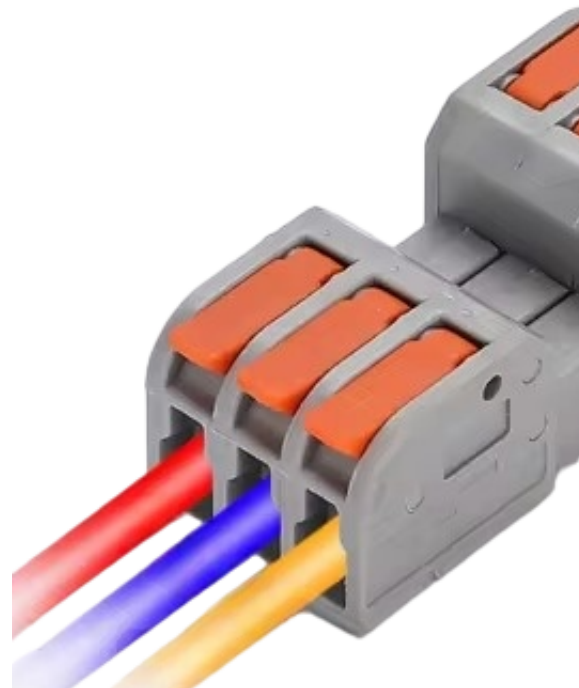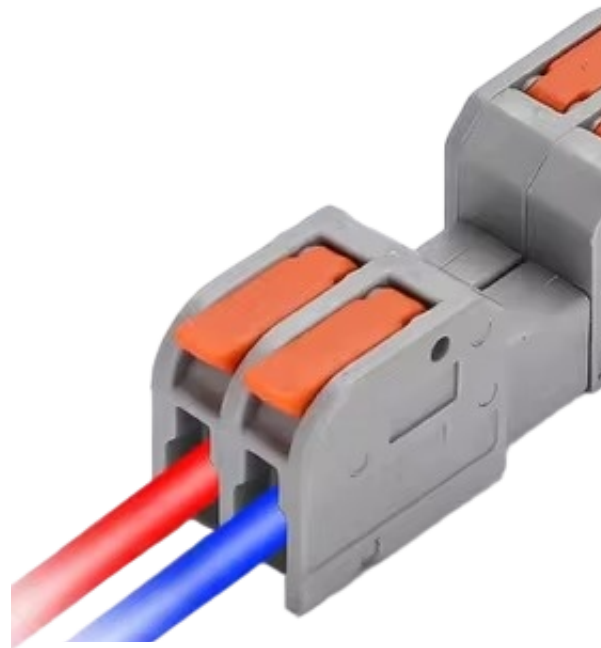



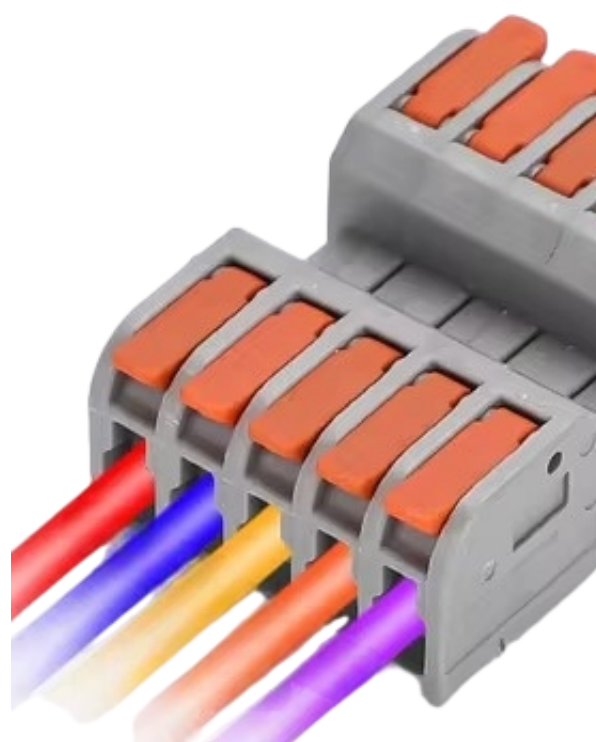





**Dane techniczne:**


- przekrój przewodu: 0,2-4mm<sup>2</sup> (przewód twardy), 0,14 - 4mm<sup>2</sup> (przewód miękki)
- napięcie znamionowe: **250V**
- typ: 5 kanałowa
- prąd znamionowy: **32A**
- **doskonała przewodność**
- wysoka odporność na utlenianie i korozję
- niełatwa do poluzowania

**Oferta dotyczy samej szybkozłączki. Dodatkowy przewód nie jest dołączany!**

DF series wiring terminal

# Fine copper guide plate male/female lug wiring terminal


Supply | One-stop procurement | Save time and effort

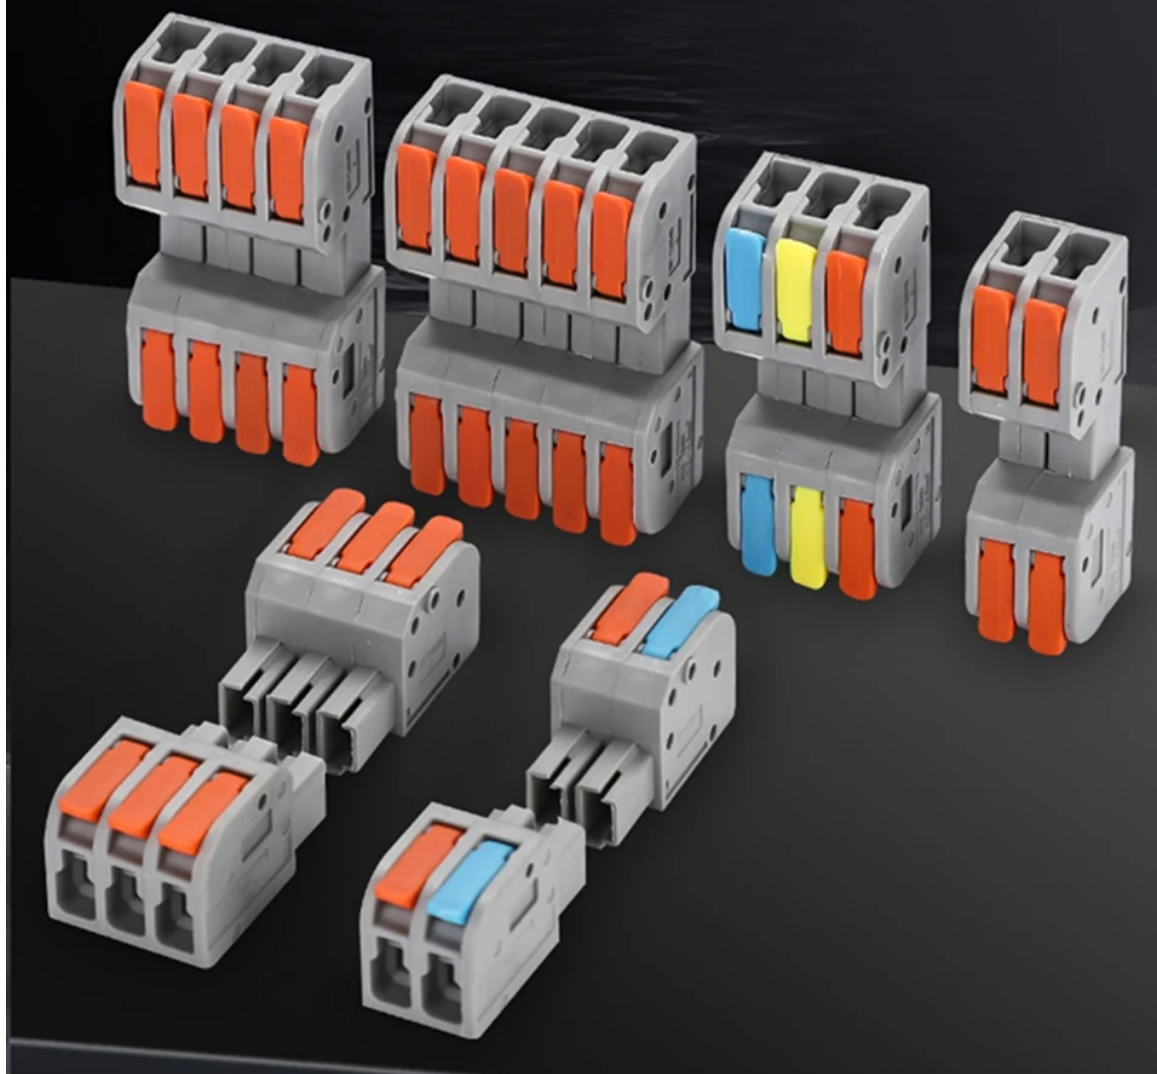



# Male/female lug wiring terminal

For long-distance wiring, connect the wires on both sides separately and then misalign male/female lug to complete the wiring.

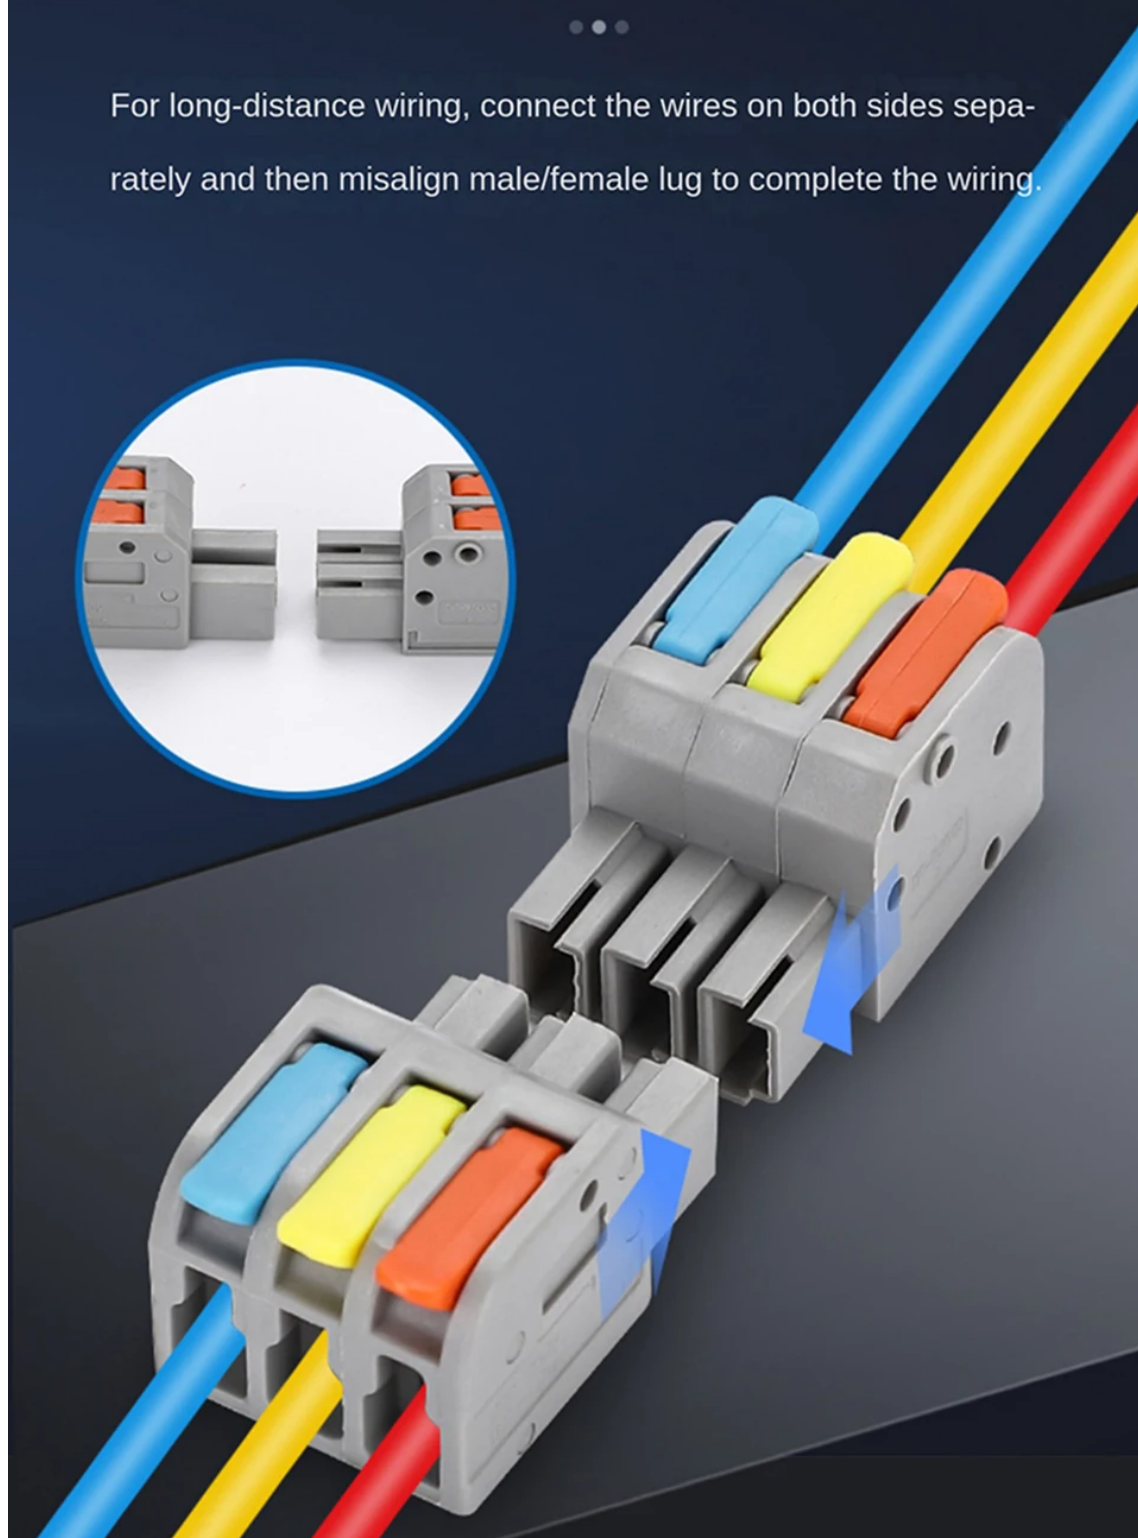



---

# Copper guide

Strong conductivity



Red copper guide, 0.8MM thickness, excellent conductivity, strong oxidation resistance and corrosion resistance, not easy to loosen



Stainless steel jump  
ring

Mouth Copper guide



---

# Flame retardant shell

## Environmentally friendly and durable



Flame retardant nylon material, not easy to deform and change color, the shell is flame retardant and high temperature resistant, and it will not support combustion even when the wire is fired





# Product Parameters

## Specification size

Product Name	Male/female lug wiring terminal	Product Current	32A
Product Model	DF series	Product voltage	250V
Wiring range	0.2-4.0mm <sup>2</sup> (Hard wire) 0.14-4.0mm <sup>2</sup> (Flexible cable)		

Let me solve  
your troubles.

A complete range  
of specifications

Multiple specifications


Willful selection



## Booster design



The booster can hold the wire firmly, and this booster can be easily opened and closed.

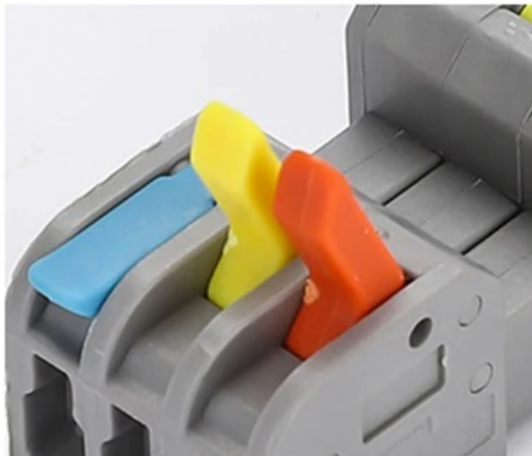

## Incoming line



Incoming line range  
0.2-4.0 mm<sup>2</sup> [hard]  
0.14-4.0 mm<sup>2</sup> [soft]



# Procedure

## Simple and convenient



Open booster wire  
insert incoming line



Press the booster by hand



Two same hole male/female lug interfaces



Complete wiring

---

# Product Photograph



