Dane aktualne na dzień: 22-10-2025 02:30

Link do produktu: https://www.gotronik.pl/zasilacz-impulsowy-do-modulow-riden-68v-1500w-p-11116.html

# Zasilacz impulsowy do modułów RIDEN 68V 1500W

| | |
|---|---|
| Cena brutto | **464,00 zł** |
| Cena netto | **377,24 zł** |
| Czas wysyłki | **24 godziny** |
| Numer katalogowy | **RD-1500-68** |
| Producent | **RD** |

## Opis produktu

# Zasilacz impulsowy do modułów RIDEN 68V 1500W

Zasilacz impulsowy RD-1500-68, wyprodukowany przez renomowanego producenta RIDEN, to niezawodne źródło zasilania o imponującej mocy 1500W. Z napięciem wyjściowym wynoszącym 68V DC oraz maksymalnym prądem wyjściowym 22,1A, jest idealnym wyborem do zasilania modułów RIDEN RD6006, RD6012 i RD6018 oraz innych wymagających urządzeń elektronicznych. Zasilacz cechuje się solidną konstrukcją i wysoką jakością wykonania, zapewniając niezawodność działania nawet w trudnych warunkach użytkowania.

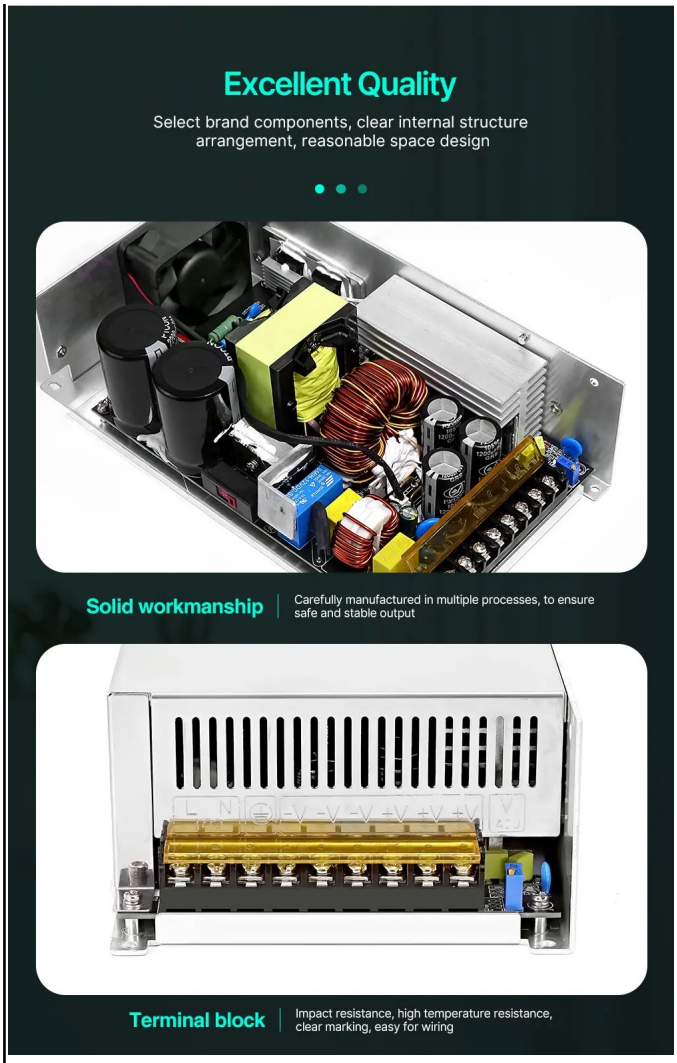


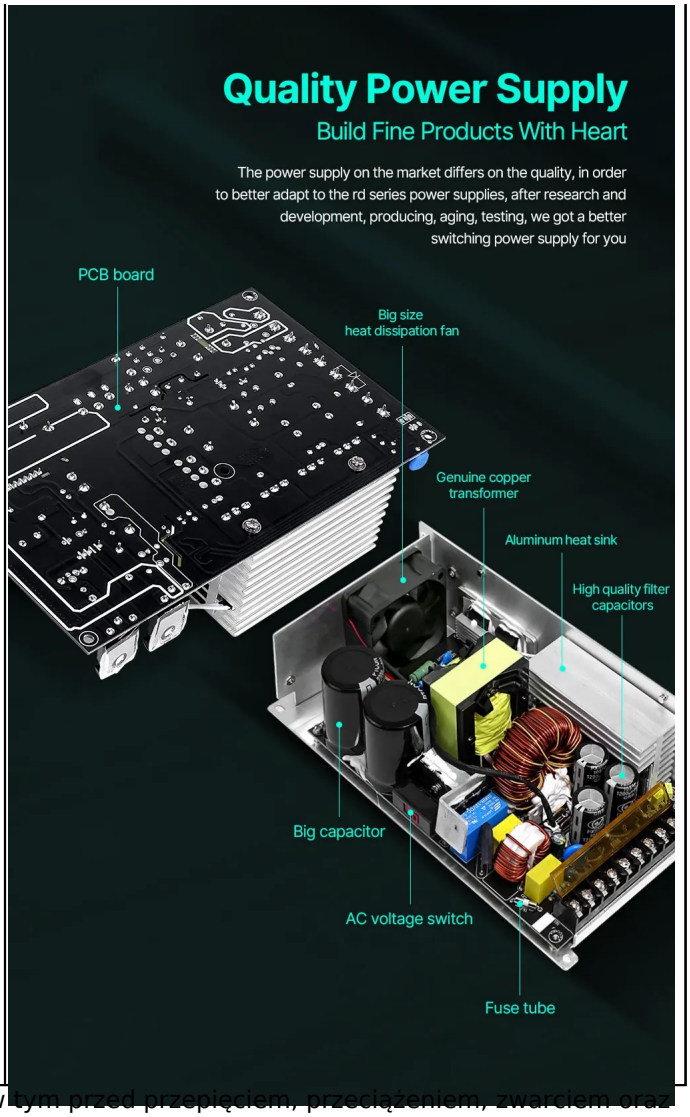


RD-1500-68 wyposażony jest w liczne zabezpieczenia, w tym przed przepięciem, przeciążeniem, zwarciem oraz przegrzaniem, co chroni zarówno zasilacz, jak i podłączone urządzenia przed uszkodzeniami. Dodatkowo, zasilacz posiada wbudowany wentylator chłodzący oraz bezpiecznik, co zapewnia efektywne chłodzenie oraz dodatkowy poziom bezpieczeństwa. Dzięki potencjometrowi do dokładnego wyregulowania napięcia wyjściowego oraz przełącznikowi napięcia zasilania 110V/230V, użytkownik może łatwo dostosować zasilacz do swoich potrzeb. Złącza śrubowe z dodatkową klapką ochronną ułatwiają przykręcanie przewodów, zapewniając solidne i bezpieczne połączenie. Zasilacz RD-1500-68 ma kompaktowe wymiary 242 x 125 x 65 mm i niską wagę 1,61 kg, co sprawia, że jest łatwy w montażu i przenoszeniu, idealny do zarówno profesjonalnych zastosowań, jak i hobbystycznych projektów elektronicznych.

**Parametry techniczne**

- producent: RIDEN
- model: RD-1500-68
- moc zasilacza: 1500W
- napięcie wyjściowe: 68V DC
- maksymalny prąd wyjściowy: 22,1A
- zasilacz impulsowy do modułów RIDEN RD6006, RD6012, RD6018
- wysoka jakość wykonania
- liczne zabezpieczenia
- napięcie zasilania: 110/230V AC 50Hz
- wbudowany wentylator chłodzący
- wbudowany bezpiecznik
- zabezpieczenie przed przepięciem, przeciążeniem, zwarciem oraz przegrzaniem
- przełącznik napięcia zasilania 110V/230V
- złącza śrubowe do przykręcenia przewodów z dodatkową klapką ochronną

- potencjometr do dokładnego wyregulowania napięcia wyjściowego
- temperatura pracy: 242 x 125 x 65 mm
- wymiary: 242 x 125 x 65mm
- waga: 1,61kg

**Zestaw zawiera**
- 1 x zasilacz impulsowy RIDEN 1500W 68V

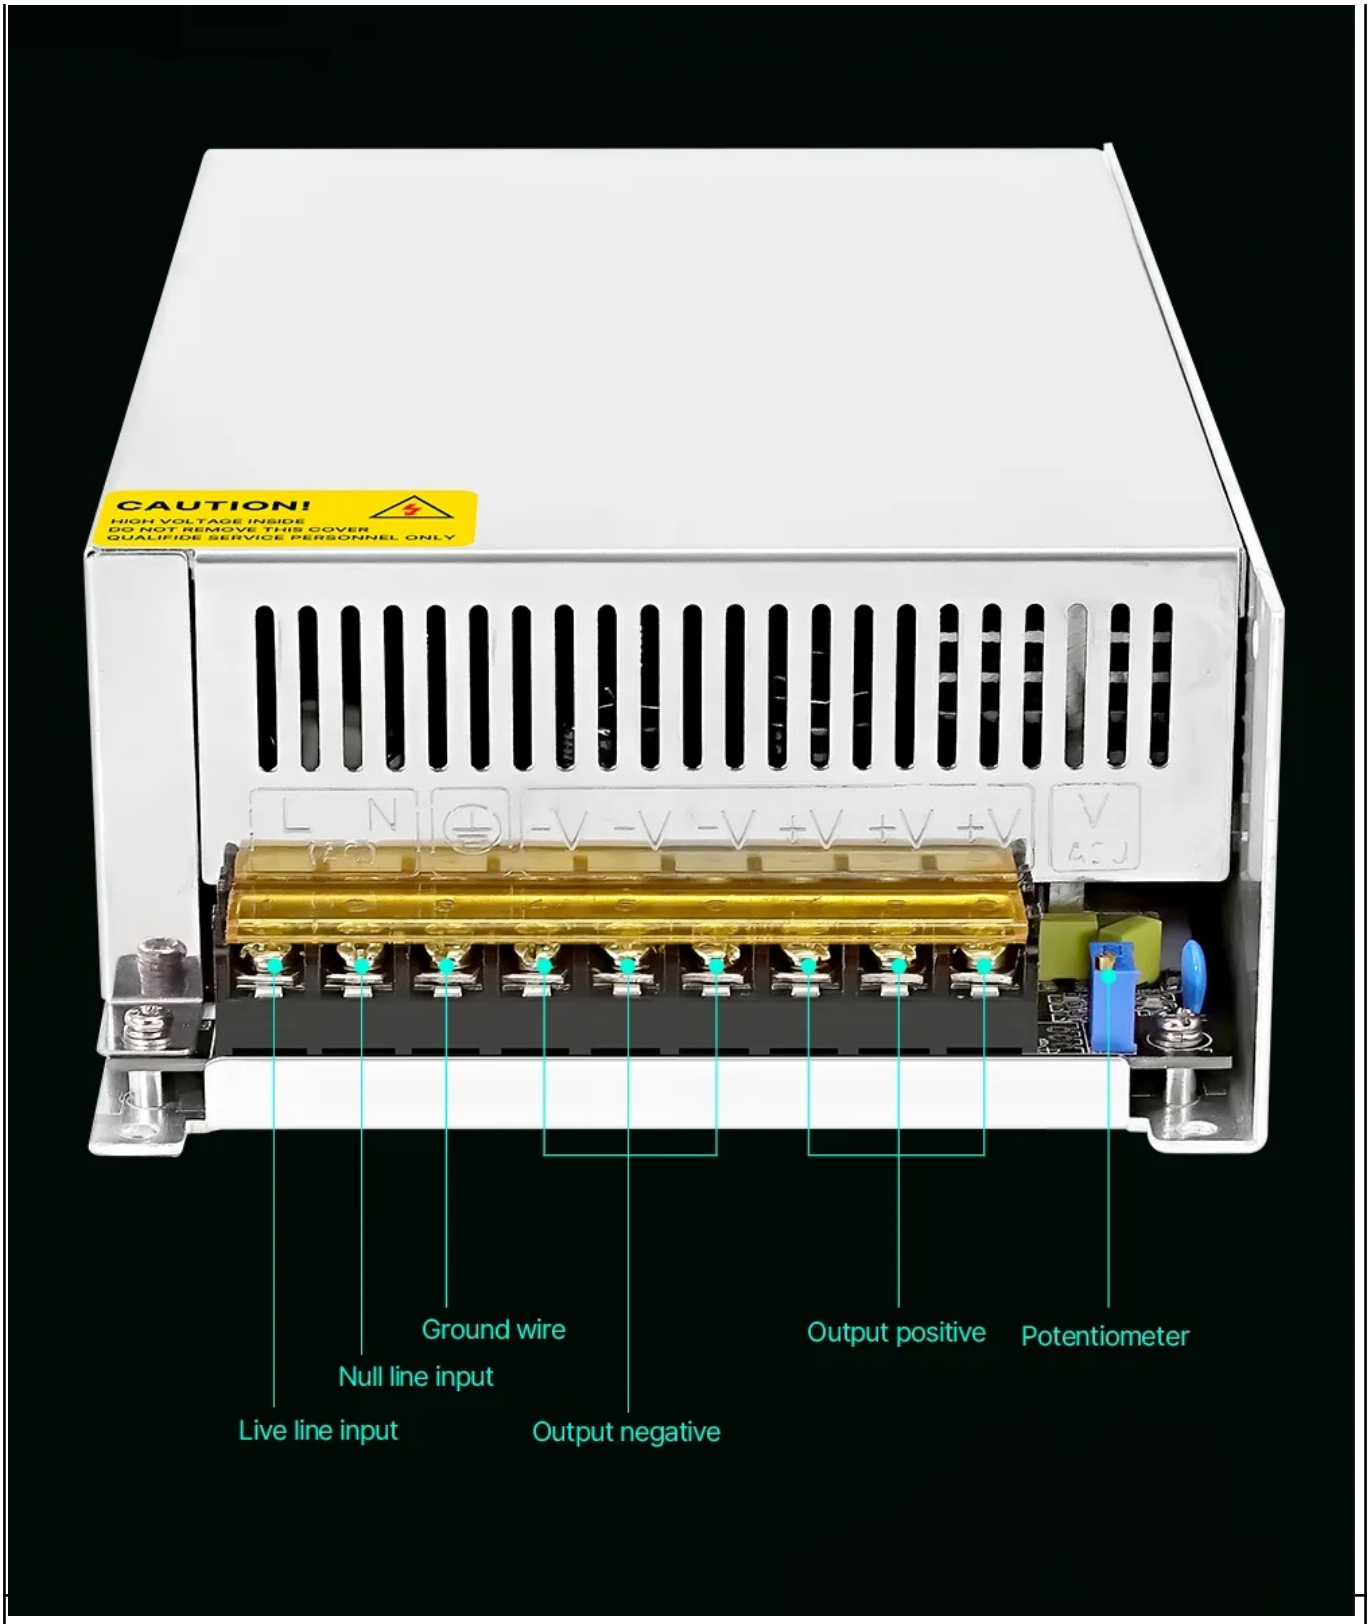
CAUTION!
HIGH VOLTAGE INSIDE
DO NOT REMOVE THIS COVER
QUALIFIDE SERVICE PERSONNEL ONLY
L
N
-V
-V
-V
+V
+V
+V
V
ADJ
Ground wire
Null line input
Live line input
Output negative
Output positive
Potentiometer

# Multiple Protections

## Stable Performance

Stable output, comprehensive protection

### Over voltage protection

Clamping protection when output exceeds 73V

### Over load protection

When the output current exceeds the rated current, it will enter constant current work mode

### Short circuit protection

Short circuit for 3 times, no damage, can recover automatically

### Over temperature protection

When temperature is higher than 83°C, it start protection, and when the temperature is normal, the output back to normal

# Temperature Control Fan

## Strong Heat Dissipation

Large size cooling fan, intelligent temperature control, superior heat dissipation performance, suitable for long time work

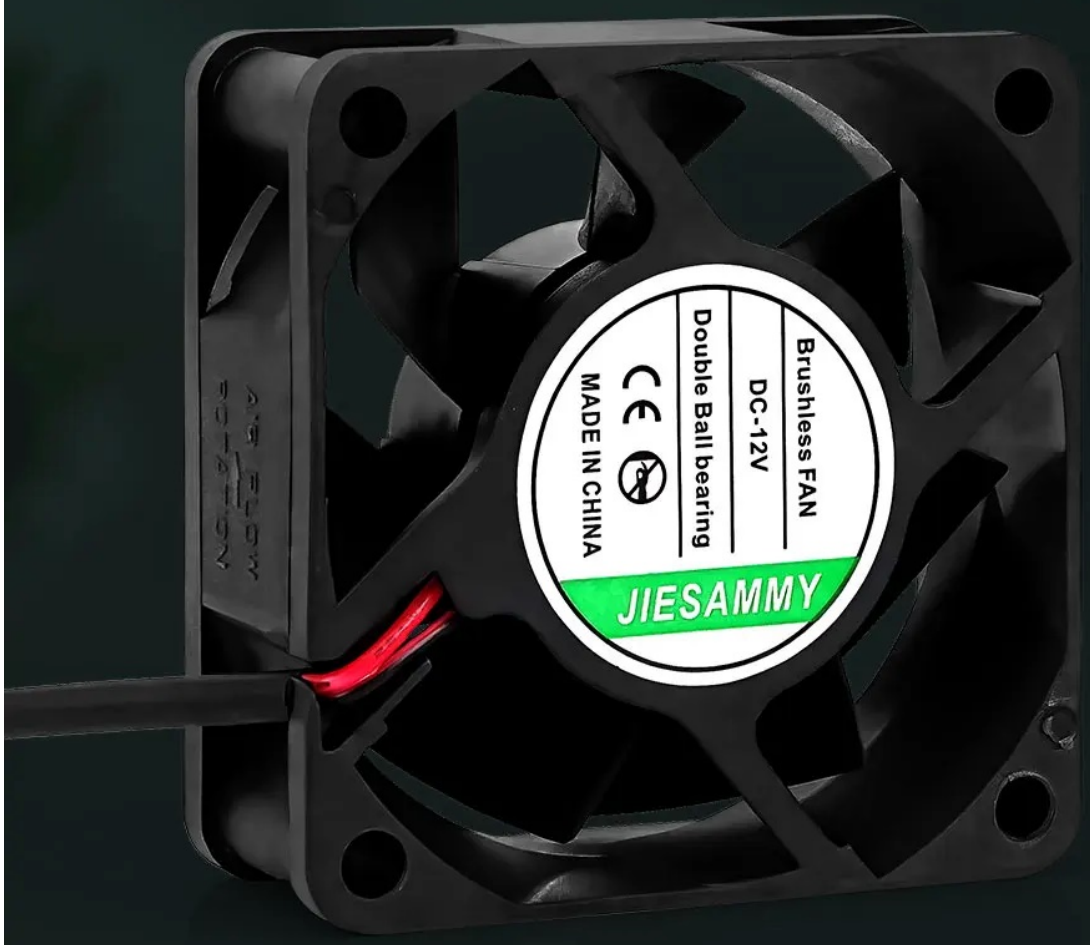


## Intelligent Variable Speed Fan

Low temperature fan stops working, when the temperature rises the fan will automatically adjust the speed according to the output load and temperature

# Quality Power Supply

## Build Fine Products With Heart

The power supply on the market differs on the quality, in order to better adapt to the rd series power supplies, after research and development, producing, aging, testing, we got a better switching power supply for you

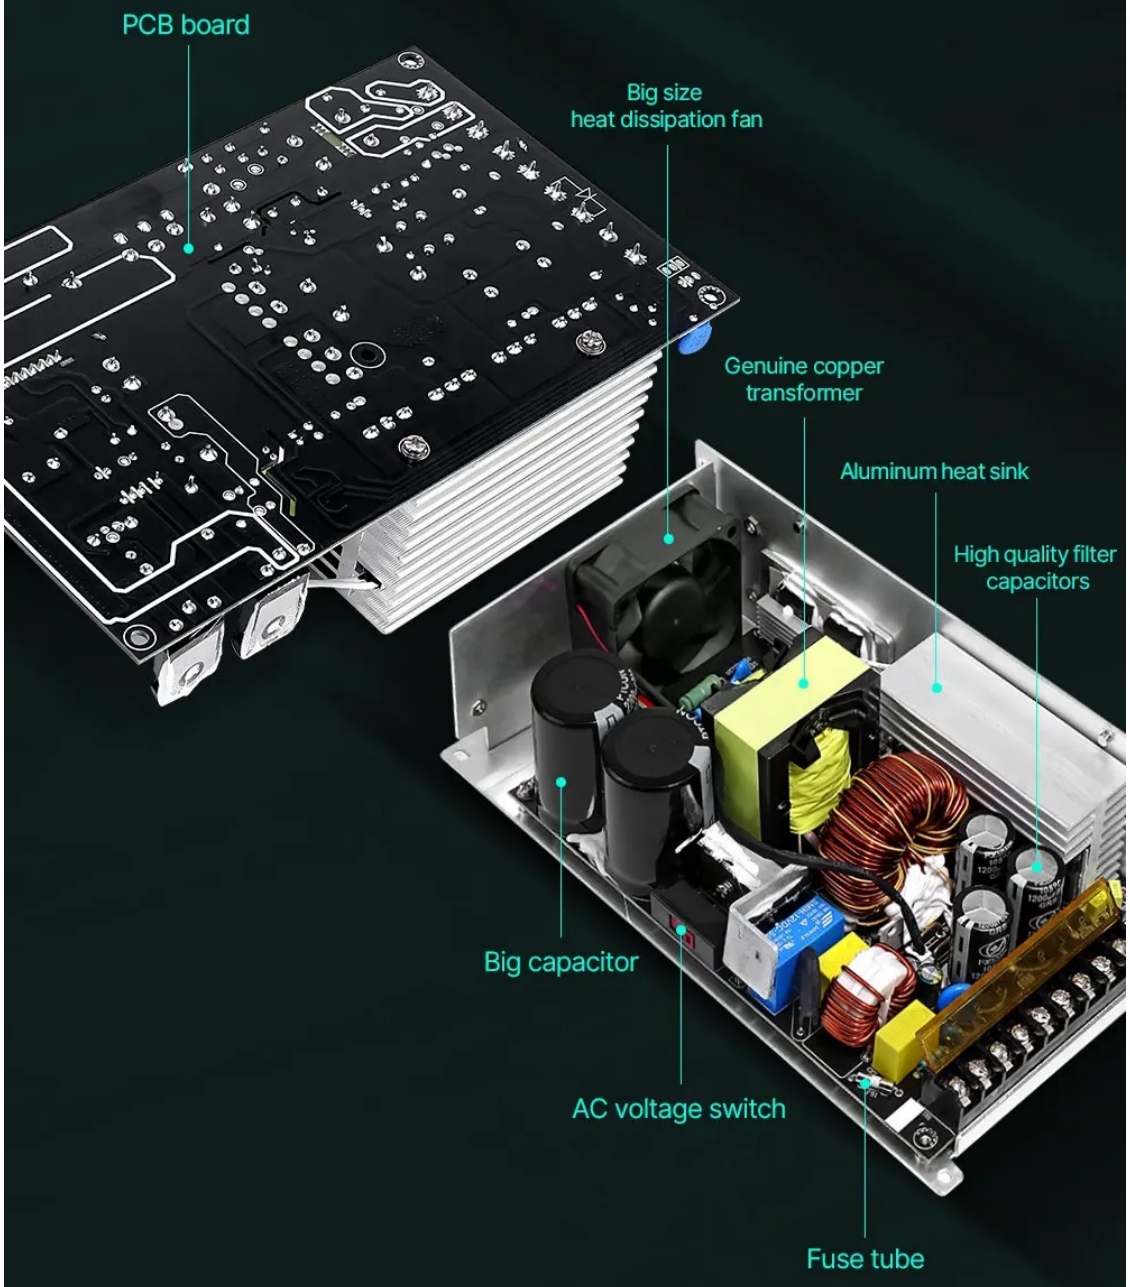

# Parameters

Let you know me better and buy a more
suitable preamp power supply

Model: **RD-1500-68**

Weight : **1.61kg**

Working temperature : **-15°C~65°C**

Product size : **242×125×65mm**

## 220V

Input voltage : **200-240V AC**

Output voltage : **68V**

Output current : **22.1A**

Output Power : **1500W**

## 110V

Input voltage : **100-120V AC**

Output voltage : **68V**

Output current : **17.7A**

Output Power : **1200W**

Input voltage
110V-220V range switch by yourself
Move the switch, choose the input voltage range
compatible with AC voltage in most countries
110/220V is selected by switch
Before power on please check
input voltage avoiding damage.
110V
220V
230
You can choose 110/220V AC input by the switch
please check the input voltage before connection to avoid damage

# Excellent Quality

Select brand components, clear internal structure arrangement, reasonable space design

**Solid workmanship** | Carefully manufactured in multiple processes, to ensure safe and stable output

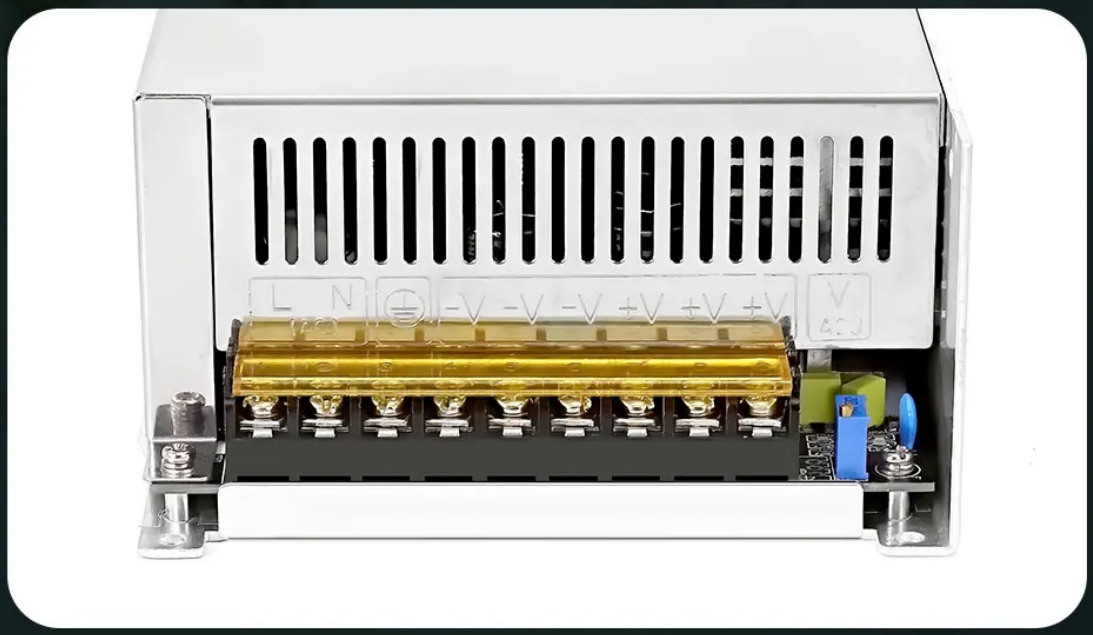


**Terminal block** | Impact resistance, high temperature resistance, clear marking, easy for wiring

**Genuine copper transformer** | Copper enameled wire, wide wire diameter. Sufficient copper wire. High temperature resistance. Enough power

**High quality filter capacitor** | High voltage withstand, low consumption, large capacity, stable performance, durable and long-lasting

**Large aluminum heat sink** | Large heat sink + intelligent temperature control fan, faster heat dissipation